

# TVL2000 II™

SKU# TVL601




## Photometric Data

Specifications subject to change without notice.

WARM WHITE (3200K)	237 FC / 2550 LUX	70 FC / 750 LUX	30 FC / 320 LUX	19 FC / 200 LUX	12 FC / 130 LUX
COOL WHITE (6500K)	418 FC / 4500 LUX	121 FC / 1300 LUX	52 FC / 560 LUX	31 FC / 330 LUX	20 FC / 214 LUX
FULL ON (4500-5000K)	660 FC / 7100 LUX	186 FC / 2000 LUX	80 FC / 860 LUX	47 FC / 510 LUX	31 FC / 330 LUX

LUX x 0.0929 = FC

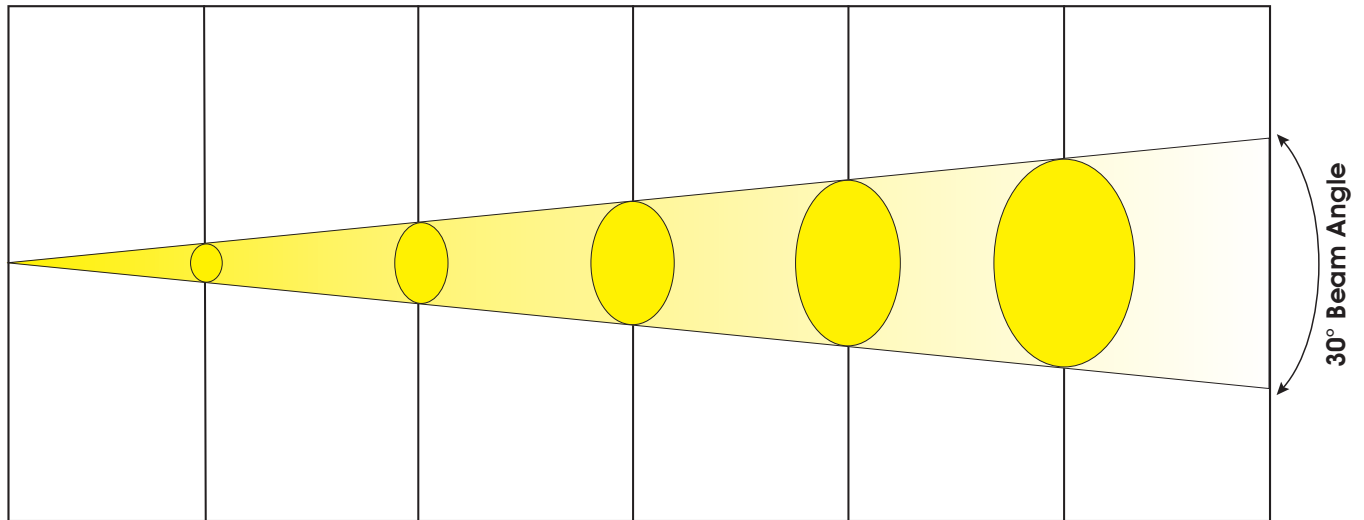

0 m	1 m	2 m	3 m	4 m	5 m
0 ft	3.3 ft	6.6 ft	9.8 ft	13.1 ft	16.4 ft

Min Beam Diameter

30° Beam Angle	Ø 0.5 m / Ø 1.6 ft	Ø 1.0 m / Ø 3.3 ft	Ø 1.6 m / Ø 5.2 ft	Ø 2.1 m / Ø 6.9 ft	Ø 2.6 m / Ø 8.5 ft
----------------	--------------------	--------------------	--------------------	--------------------	--------------------

Elation Professional USA | 6122 S. Eastern Ave. | Los Angeles, CA. 90040  
 323-582-3322 | 323-832-9142 fax | www.elationlighting.com | info@elationlighting.com

Elation Professional B.V. | Junostraat 2 | 6468 EW Kerkrade, Netherlands  
 +31 45 546 85 66 | +31 45 546 85 96 fax | www.elationlighting.eu | info@elationlighting.eu