

Jester 24/48

48 Channel Memory Lighting Console

Key Features

- 48 Channel Memory Lighting Console
- Playback stack
- Patching to 512 DMX channels
- DMX in allowing snapshots of all 512 DMX channels
- VGA Monitor Port
- USB storage and keyboard support
- MIDI Notes & Show Control
- Lock Function
- LCD Display for stand-alone use
- Online Help in multiple languages
- Offline Editor (Phantom Jester)
- Remote triggers
- Upgradeable firmware
- External power supply
- 24/48 channels of control
- 48 Submasters
- 24 Auxillary Buttons



Overview

Jester 24/48 is perfect for small to medium show lighting applications where a greater channel count is needed. With a wide range of features, intuitive operation and great value, Jester 24/48 delivers outstanding performance show after show.

The three operating modes feature control in preset, program or playback including using a traditional theatre playback stack. The Jester 24/48 is a fully functional memory console complimented with on-board LCD display and plug-in monitor port as standard.

With 24 auxiliary buttons used to trigger DMX devices such as scrollers, smoke machines or strobes, MIDI capabilities, a USB port to backup shows and even a DMX In port for snapshot/backup use, the Jester 24/48 delivers truly wide user appeal.

*Monitor not included









Ordering Information


00-109-00 Jester 24/48

00-767-00 Flightcase Jester 24/48

Supplied Accessories

Power Supply Operating Manual (on CD)

Dimensions

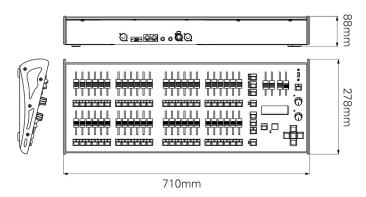

Weight: 6.5Kg

Specifications

Control Channels: Up to 512

Channel Faders: 48Preset Master Faders: 2

Fade Time Controls: 1 (Split Up/Down times can be programmed)

Sequence Speed Control: 1
Sequence Master Fader: 1
Grand Master Fader: 1
Blackout Button: 1
Flash Buttons: 48

Midi In/Thru

VGA Monitor Port

Audio Input

Remote Input

Storage and Keyboard Connections

Power Supply: External 100-240 Volts 50/60Hz

DMX Output: 1 UniverseDMX Input: 1 Universe

DMX to USITT DMX-512 1990 Protocol

Dimensions: 88mm(H) x 710mm(W) x 278mm(D)

Weight: 6.5Kg (14.3lb)

Operating environment: +5°C to +40°C
Humidity: 5% to 95% Non condensing

. .

Contact your local Eaton office

Usk House, Lakeside, Llantarnam Park, Cwmbran, Torfaen, NP44 3HD. UK

T: +44 (0)1633 838088 F: +44 (0)1633 867880 E: enquiries@zero88.com www.zero88.com



Eaton Industries Manufacturing GmbH Electrical Sector EMEA Route de la Longeraie

Route de la Longeraie 71110 Morges, Switzerland Eaton.eu

© 2015 Eaton All Rights Reserved

Jester_24_48_Datasheet_UK_Rev3_0615

Changes to the products, to the information contained in this document, and to prices are reserved; so are errors and omissions.

Eaton is a registered trademark.

All other trademarks are property of their respective owners.



